## ICB SH, 120/240V SST

Height: 32.8" Width: 11.8" Depth: 23.2" (83.3cm) (30.0cm) (58.9cm)



- Sleek modernized design language, with rounded angles on the corners and trunk
- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- BUNN Infusion Series technology allows for multiple recipes from one footprint --with three brew buttons and three batch sizes
- Energy-saver mode reduces tank temperature during idle periods
- The exclusive Peak Extraction® Sprayhead provides improved uniformity of extraction and greater resistance to limescale buildup.
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- New Soft Heat® servers [sold separately] are ergonomic, lighter weight, energy
  efficient and now offer programmable recipe/batch based holding times and
  temperatures, alerting staff when freshness has expired or server is empty

Additional Features

Agency:

#### **Specifications**

Product #: 51100.0110
Water Access: Plumbed

Finish: Stainless
Funnel: Black Plastic

**Electrical & Capacity** 

Volts*	Amps	s Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
120/240	14.6	3500	Yes/	-	8	60°F (15.5°C)	1	3	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

### Plumbing Requirements


PSI kPa		Fitting Supplied	Water Flow Required (GPM)		
20-90	138-621	3/8" Male Flare Fitting	1.00		


#### **CAD Drawings**


2D	Revit	KLC		

MARNING:





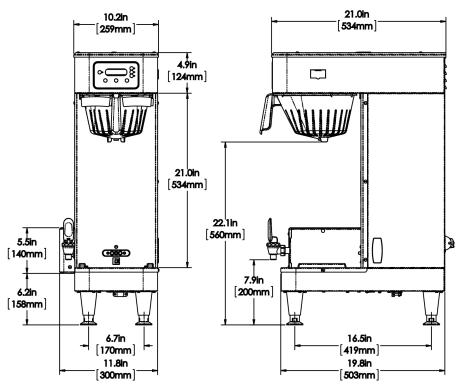

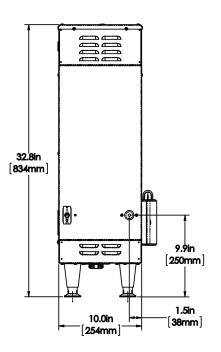

	Unit			Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	32.8 in.	11.8 in.	23.2 in.	37.4 in.	15.3 in.	28.6 in.	47.500 lbs	9.442 ft <sup>3</sup>	
Metric	83.3 cm	30.0 cm	58.9 cm	94.9 cm	38.7 cm	72.7 cm	21.546 kgs	0.267 m³	



# Related Products & Accessories:ICB SH, 120/240V SST(51100.0110)



1SH STAND, CE 220-240V INF SERIES

Product #: 27825.0300




2SH STAND, CE 220-240V INF SERIES

Product #: 27875.0300



KIT, DRIP TRAY INF TWIN SH

Product #: 53452.0000





# Serving & Holding Options: ICB SH, 120/240V SST(51100.0110)



